

Etude de : **Grave Drainante béton concassé**


Agence : SPL
Site : GENNEVILLIERS

Dossier : BRE 07 032
Date : 1/1/07


DS (t/m3)					OPM	
IPI					0/D	
W (%)					W%	
Densité humide pour compactage chantier					q2	0.00

FORMULE :

0/6.3 BC Gennevilliers 15.0%
6.3/20 BC Gennevilliers 85.0%

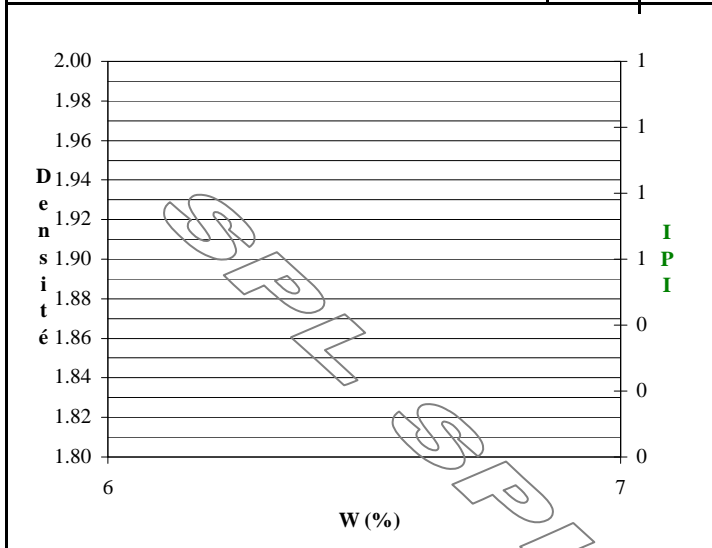

Tamis mm	31.5	20.0	10.0	6.3	5.0	4	2.0	1.0	0.500	0.250	0.063
% Passant	100.0	79.6	27.8	17.3	15.8	14.6	10.9	7.8	5.2	2.8	1.0

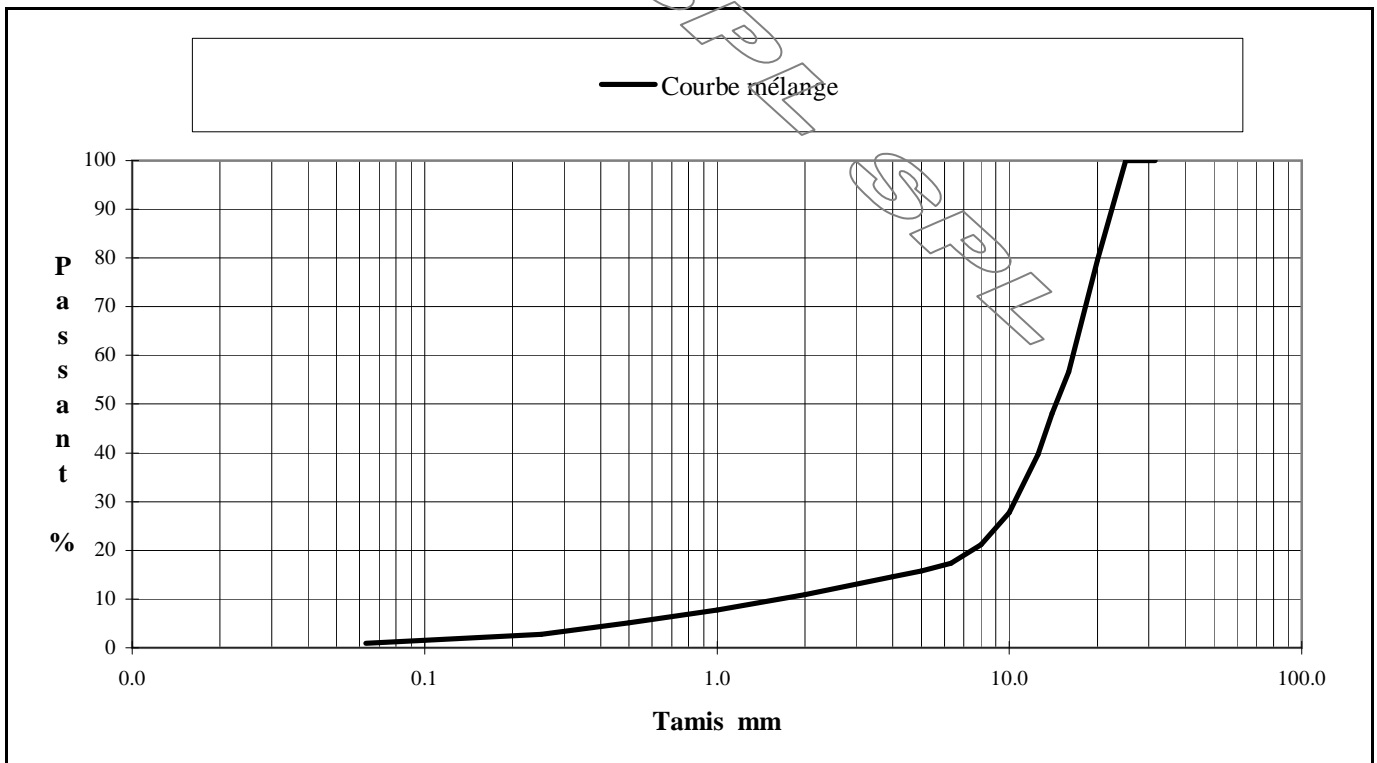

Observation :